
BAYLAR ATÖLYE
NANXING TÜRKİYE TEK YETKİLİ SATICISI


SERVO MOTORLU SÜREKLİ BESLEMELİ HAT DELİK MAKİNELERİ
THROUGHFEED DRILLING MACHINE WITH SERVO DRIVED

MODEL NDC662 A


Servo Motorlu Sürekli Besleme Hat Delik Makinesi
Throughfeed Drilling Machine with Servo Drived
Opsiyon / Optional: **NDC 532A , NDC 642 A**



Kolay değişebilen delik blokları
Quick Change Drilling Block




Profesyonel Delik optimize yazılımı
Professional drilling optimizing software



Matkap sıralarının yatay ve dikey yönleri servoludur
The horizantal and vertical directions of the drill rows are driven by servo

* Min.düşey delik arası 128 mm

* Min.Vertical hole spacing 128 mm

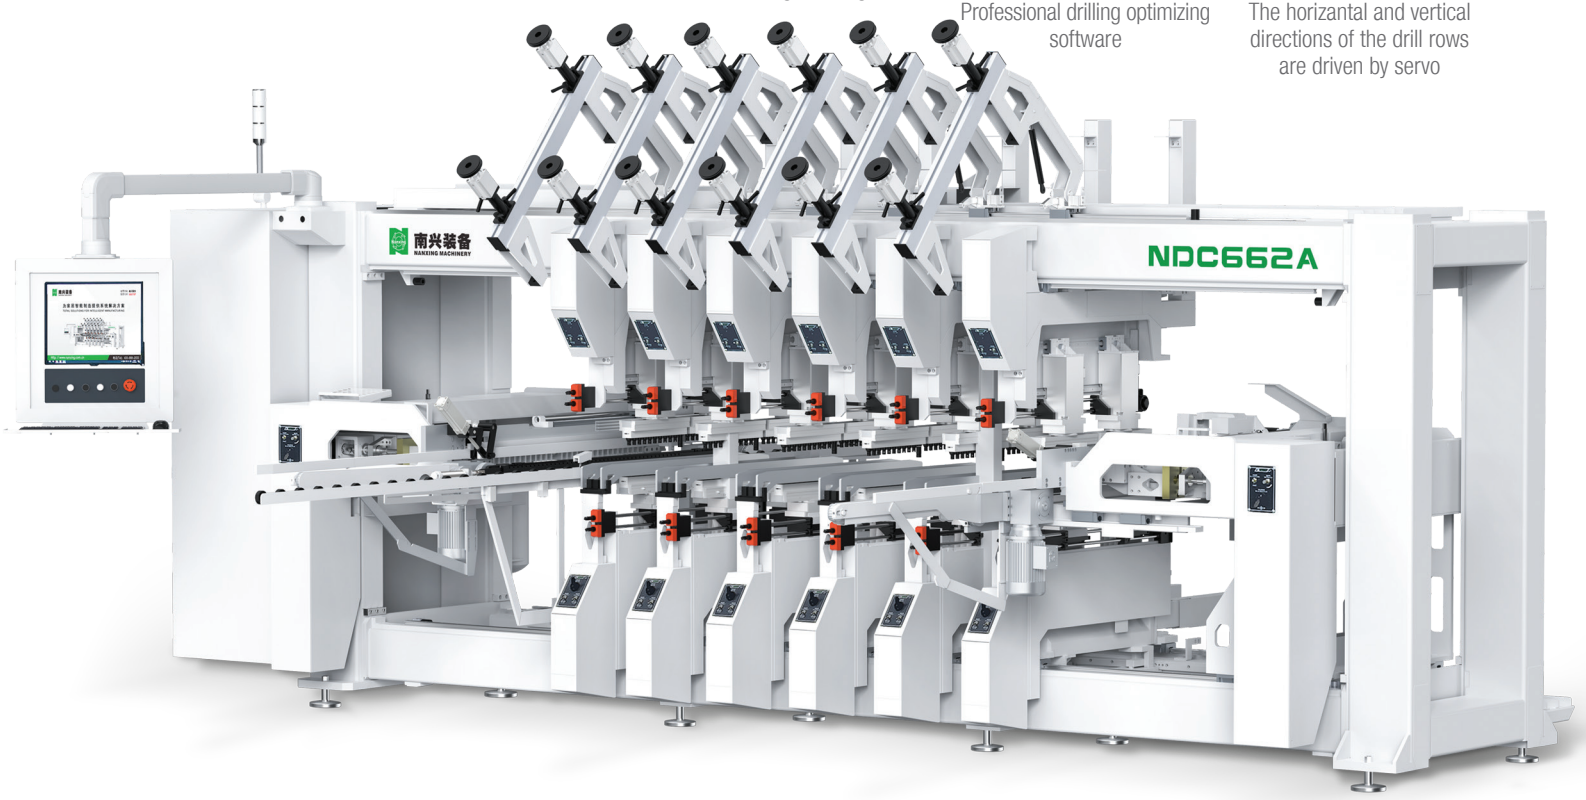

MODEL	Max. Panel Genişliği Max. Panel Width	Min. Panel Genişliği Min. Panel Width	Max. Panel Kalınlığı Max. Panel Thickness	Delik Aralığı Spacing of Drills	Max. Max.Drilling Depth of Vertical Drills	Max. Max.Drilling Depth of horizantal Drills	Toplam Güç Total Power	Net Kg Net Weight	Makine Ölçüsü Overall Dimension (L-W-H)
NDC662 A	2550mm	250mm	60mm	32mm	45mm	40mm	62kw	7600kg	5540*3660*2350mm